

Data Sheet

Temperature sensor Types **MBT 5250, MBT 5260** and **MBT 5252**

Heavy-duty marine approved temperature sensor.



MBT 5250
MBT 5260



MBT 5252

Heavy-duty temperature sensors for controlling cooling water, lubrication oil, hydraulic oil and refrigeration plants within general industry and marine applications. These temperature sensors are based on a standardized Pt 100 or Pt 1000 element, which gives a reliable and accurate measurement. All three sensor types can be delivered with NTC / PTC elements on request.

In the low temperature version (-50 – 200 °C) the measuring insert is based on a silicone cable, which makes the sensor very resistant towards vibrations. The MBT 5250 with changeable measuring insert and MBT 5260 with fixed measuring insert are equipped with EN 175301-803-A, Pg 9 as standard. The MBT 5252 is equipped with a B-head as standard, but can also be delivered with B-mini Head on request.

If needed, a transmitter (MBT 9110) can be ordered as an integrated part of the MBT 5252 sensor.

Features:

- Gaseous or liquid media, e.g. air, gas, vapour, water or oil
- Up to 200 °C media temperature (MBT 5250 and MBT 5260)
- Up to 200 °C or 400 °C media temperature (MBT 5252)
- Pt 100 or Pt 1000 sensing element
- Can be used with 2 or 3 wire connections
- Gold plated male and female connector (MBT 5250 and MBT 5260)
- MBT 5250 and MBT 5252 with interchangeable measuring insert
- MBT 5260 with fixed measuring insert
- Available with built-in transmitter (MBT 5252)

Product specification

Technical data

MBT 5250, MBT 5260

Table 1: General data

Features	Description	
Measuring range	-50 – 200 °C	
Sensing element	Pt 100, Pt 1000	
Protection tube	ø8 × 1 mm	
Permissible media velocity	Air	25 m/s
	Water	3 m/s

Table 2: Connection

Process connection	G ¼ A	G ¼ A G ¾ A – M18	G ¾ A M24
Max. tightening torque	25 Nm	50 Nm	100 Nm

Table 3: Response times

Type	Protection tube	Indicative response times			
		Water 0.2 m/s		Air 1 m/s	
		t _{0.5}	t _{0.9}	t _{0.5}	t _{0.9}
MBT 5250 with interchangeable measuring insert	ø8 × 1 mm	9 s	33 s	95 s	310 s
MBT 5260 with fixed meas. ins.	ø8 × 1 mm	6 s	20 s	35 s	140 s


Table 4: Mechanical and environmental specifications

Features	Description	
Sensor tolerances	EN 60751 Class B: $\pm (0.3 + 0.005 \times t)$	t = temperature of medium, numerical value
Vibration stability	Shock:	100 g / 6 ms
	Vibrations:	4 g sine function 5 – 200 Hz, measured acc. to IEC 60068-2-6
Enclosure	IP65 according to IEC 60529	
Cable entry EN 175301-803	Pg 9, Pg 11 or Pg 13.5	

Table 5: Materials

Features	Description
Protection tube in contact with media	W.no. 1.4571 (AISI 316 Ti)
Process connection	W.no. 1.4404 (AISI 316 L)
Extension length	W.no. 1.4571 (AISI 316 Ti)
Union	Nickel plated brass
Gasket	Silicone
Plug EN 175301-803	PA 6.6 (max 125 °C)

Table 6: Max. temperature and load

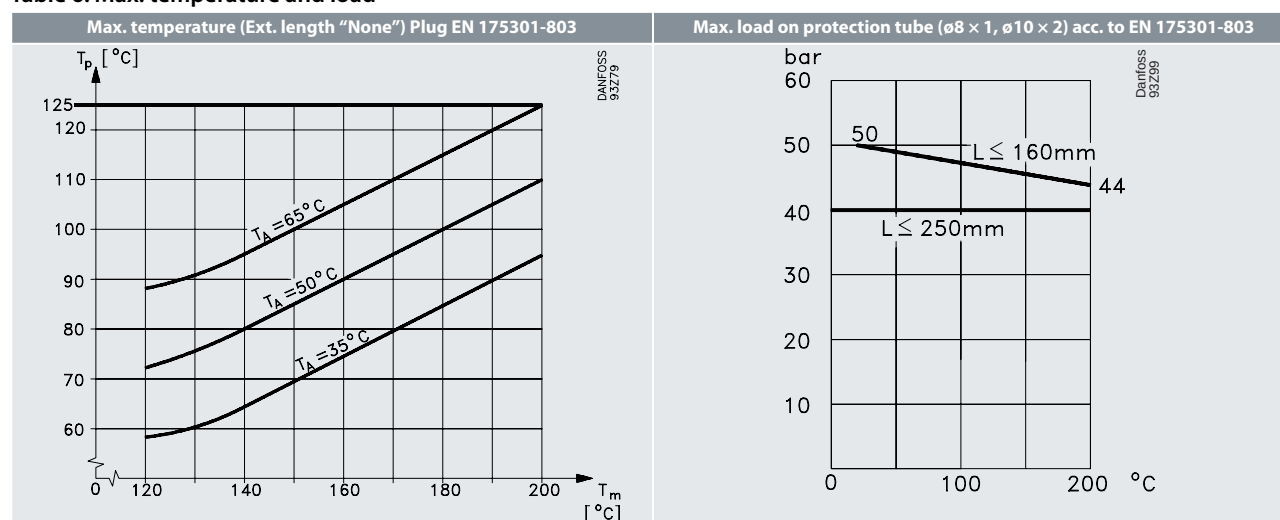

L	Insertion length	T_p	Temperature for electric plug
T_m	Media temperature	T_A	Ambient temperature

NOTE:

For extension length = 50 mm no limitations up to 200 °C media temperature and 90 °C ambient temperature.

MBT 5252

Table 7: General data

Features	Description
Measuring range	-50 – 200 °C or -50 – 400 °C
Sensing element	Pt 100, Pt 1000
Protection tube	Low temperature: ø10 x 2 mm High temperature: ø11 x 1 mm
Permissible media velocity	Air 25 m/s Stream 25 m/s Water 3 m/s

Table 8: Connection

Process connection	G ¼	G ¼ A – G ½ A G ¾ A – M18	G ¾ A M24
Max. tightening torque	25 Nm	50 Nm	100 Nm

Table 9: Response times

Type	Protection tube	Indicative response times			
		Water 0.2 m/s		Air 1 m/s	
		t _{0.5}	t _{0.9}	t _{0.5}	t _{0.9}
MBT 5252	ø10 x 2 mm	14 s	42 s	110 s	390 s
MBT 5252 (HT)	ø11 x 1 mm	25 s	80 s	150 s	450 s

Table 10: Materials

Features	Description
Protection tube in contact with media	W.no. 1.4571 (AISI 316 Ti)
Process connection	W.no. 1.4404 (AISI 316 L)
Extension length	W.no. 1.4571 (AISI 316 Ti)
Union	Nickel plated brass
Connection head	Die cast aluminium


Temperature sensor, Types MBT 5250, MBT 5260 and MBT 5252

Table 11: Mechanical and environmental specifications

Features	Description	
Max. ambient temperature ⁽¹⁾	Sensors without transmitter	90 °C
	Sensors with transmitter	85 °C
Sensor tolerance	EN 60751 Class B: $\pm (0.3 + 0.005 \times t)$	t = temperature of medium, numerical value
Vibration stability	Shock:	100 g / 6 ms
	Vibrations:	4 g sine function 5 – 200 Hz, measured acc. to IEC 60068-2-6
Enclosure	IP65 according to IEC 60529	
Cable entry B-head	Pg16	
Cable entry BM	Pg 9	
Temperature transmitter MBT 9110	Supply voltage:	8 – 35 V DC
	Output:	4 – 20 mA

⁽¹⁾ The temperature of the transmitter is influenced by media temperature, ambient temperature and ventilation in the engine room. If the temperature of the transmitter exceeds the max. allowed temperature the transmitter must be data placed in a separated enclosure, as described in the separate sheet for MBT 9110.

Table 12: Max. load on protection tube according to DIN 43763

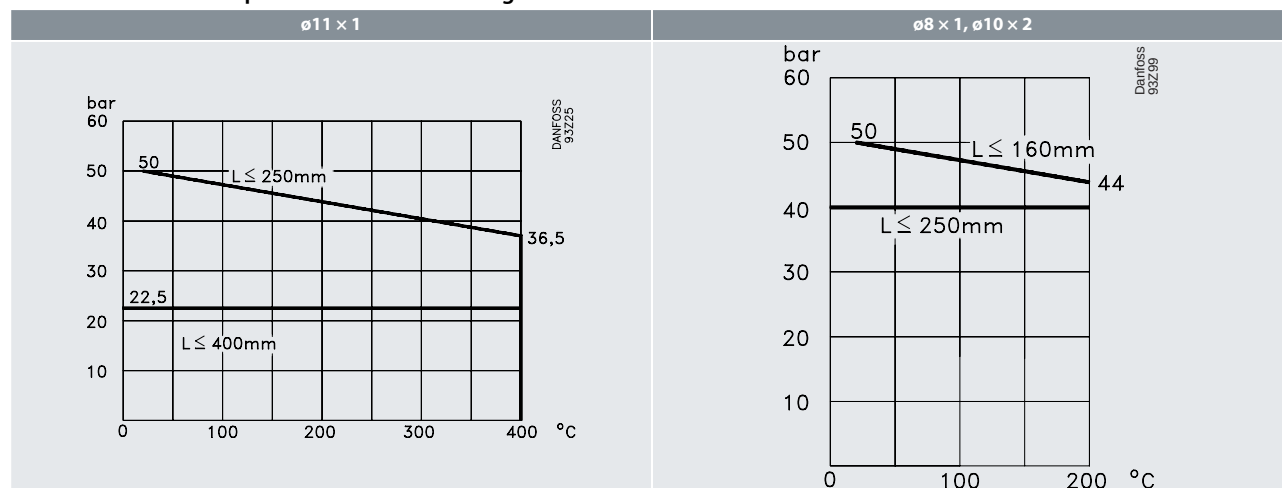


L Insertion length

Dimensions

MBT 5250, MBT 5260

Table 13: Extension length

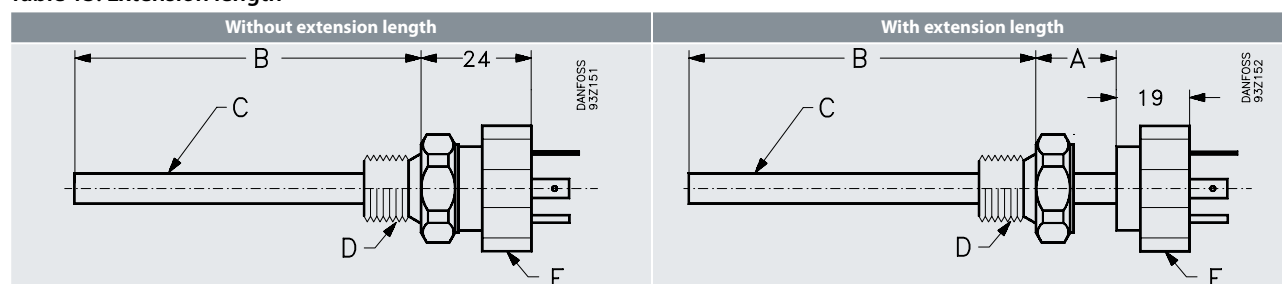

A Extension length

B Insertion length

C Protection tube

D Process connection

E Union

NOTE:

- Tightening torque for the mounting screw at the rear end of the electrical connection plug: 25 Ncm
- Tightening torque for the union (position "E"): 17 Nm

Table 14: Gasket and Plugs

Gasket	Plugs	

Units: mm


Table 15: Connection

Process connection	G ¼	G ¼ A – G ½ A G ¾ A – M18	G ¾ A M24
Width across flats	HEX 22	HEX 27	HEX 32

MBT 5252

Unit: mm

Figure 1: Dimension and parts

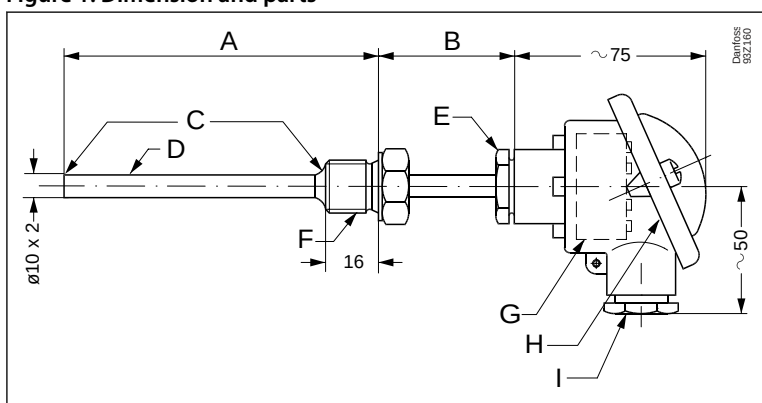

A	Insertion length	D	Protection tube	G	Transmitter type MBT 9110, as terminal block
B	Extension length	E	Union nut	H	Connection head, type B
C	Welded	F	Process connection	I	Pg 16

Also available with:

Figure 2: Type BM

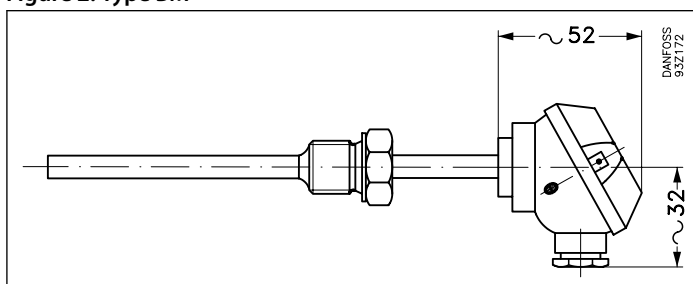



Table 16: Connection

Process connection	G ½ A, ½–14 NPT	G ¾ A
Width across flats	HEX 27	HEX 32

Electrical connection

MBT 5250, MBT 5260

Figure 3: Electrical connection



2-wire, 3 terminals
(Ground not connected)

MBT 5252

Table 17: Electrical connection

With temperature transmitter			Without temperature transmitter 1 x Pt100			Without temperature transmitter 2 x Pt100		
	B	1xTC		C	1xPt		C	2xPt
	C	1xPt		D			F	
	D			E			G	
	E			F				
	F	G		G	Danfoss 84216			Danfoss 84214
		Danfoss 84217						

A	Jumper	D	4-Wire
B	Termocuple	E	3-Wire
C	2-Wire	F	2-Wire
	3-Terminals	G	Connection
	Jumper connected		

Ordering

MBT 5250

Figure 4: Ordering for MBT 5250

Type MBT 5250		Sensor									
Measuring range, sensor element											
-50 – 200 °C											
Sensing element											
1 × Pt 100											
1 × Pt 1000 (Class B only)											
2 × Pt 100											
2 × Pt 1000 (Class B only)											
1 x NTC 2055 ± 1% Ohm											
Protection Tube, W.nr. 1.4571 (AISI 316 Ti)											
Acid-proof steel, ø8 × 1 mm											
Solid drilled, tapered, ø12 to ø14.5											
Acid-proof steel, ø10 x 2 mm											
Acid-proof steel, ø10 x 2 mm											
Extension length											
None											
50 mm											
Insertion length											
050 mm											
060 mm											
080 mm											
100 mm											
120 mm											
150 mm											
200 mm											
250 mm											
Tolerance											
EN 60751 Class B											
1/3 EN 60751 Class B											
1/6 EN 60751 Class B											
EN 60751 Class A											
B-value (25°/85° C): 3540 ± 1%											
Process connection											
None											
G 1/4 A ¹⁾											
G 1/2 A											
1/2 – 14 NPT											
G ¾ A											
M18 × 1.5											
M24 x 2											
G 3/8 A											
M33 x 2											
1/4 – 18 NPT											
M22 x 1.5											
M16 x 1.5											
M14 x 1.5											
Adjustable fitting, Brass G 1/4 A ¹⁾											
3/4 – 16 UNF											
1/4 – 18 NPT											
M20 x 1.5											
Electrical Connections											
EN 175301/803 excl. female plug											
EN 175301/803 Plug Pg 9 (IP65)											
EN 175301/803 Plug Pg 11 (IP65)											
EN 175301/803 Plug Pg 13.5 (IP65)											
APD plug ISO 15170-1											
DIN 0627, M12											
EN 175301/803 Plug Pg 11 (IP65) with finger screw											
EN 175301/803 Plug Pg 9 (IP65) special											
ITT Cannon 4 pins Au											
Other											
EN 175301/803 GL plug Pg 13.5 (IP65) Sn pins											
EN 175301/803 plug Pg 9, 4 pins without earth (IP65)											
EN 175301/803 plug Pg 11, 4 pins without earth (IP65)											
Hunnel HSK-M/Pg 9 (IP68) Metal											
EN 175301/803 plug M16 (IP 65)											

¹⁾ Only ø8 x 1 mm tube

 Preferred versions

MBT 5260

Figure 5: Ordering for MBT 5260

Type MBT 5260	
Sensor	
Measuring range, sensor element	
-50 – 200 °C	0
-30 – 150 °C	1
Sensing element	
1 × Pt 100	0
1 × Pt 1000 (Class B only)	1
2 × Pt 100	2
Other	9
Protection Tube, W.nr. 1.4571 (AISI 316 Ti)	
Acid-proof steel, ø8 x 1 mm	0
Solid drilled, tapered, Ø12 to Ø14.5	1
Acid-proof steel ø10 x 2 mm	2
Acid-proof steel, ø9.5 x 1 mm	3
Solid drilled, ø4.2	4
Other	9
Extension length	
None	0
50 mm	1
Other	9
Insertion length	
030 mm	030
040 mm	040
050 mm	050
060 mm	060
080 mm	080
100 mm	100
120 mm	120
150 mm	150
200 mm	200
250 mm	250
Tolerance	
EN 60751 Class B	0
1/3 EN 60751 Class B	1
1/6 EN 60751 Class B	2
Other	9
Process connection	
None	0
G 1/4 A ¹⁾	1
G 1/2 A	2
1/2 – 14 NPT	3
G ¾ A	4
M18 x 1.5	5
M24 x 2	6
G 3/8 A	7
M14 x 1.5	8
Other	9
Electrical Connections	
EN175301/803 plug Pg 9 (IP65)	1
EN175301/803 plug Pg 11 (IP65)	2
EN175301/803 plug Pg 13.5 (IP65)	3
M12 plug, 4 wire, 4 pins	4
DIN 72585 Bayonet plug	5
DIN 43650, Plug Pg9 (IP65) Special	7
M12 plug, 2 wire, 4 pins	8
EN175301/803 Pg 11 – 4 pins without earth (IP65)	C
Other	9

¹⁾ G 1/4 A only for ø8 mm protection tube

 Preferred versions

MBT 5252

Figure 6: Ordering for MBT 5252

Type MBT 5252	Sensor														Transmitter											
						-									-											
																			Transmitter setting, end of range							
Measuring range, sensor element																										
-50 – 200 °C	0																		0	0	0 °C (or none)					
-50 – 400 °C	1																		1	1						
																			2	2						
																			3	3						
																			9	4	Temperature range 220 °C = 22 Temperature range 150 °C = 15 1. digit defines 100's 2. digit defines 10's					
																				5						
																				6						
																				7						
																				8						
																			9	9	Other					
																			Transmitter setting, start of range							
Sensing element																										
1 × Pt 100	0																		0	None						
2 × Pt 100 (-50 – 200 °C)	1																		1	0 °C						
1 × Pt 1000	2																		4	-50 °C						
2 × Pt 1000 (-50 – 200 °C)	3																		9	Other						
Other	9																									
																			Transmitter type As terminal block							
Protection Tube, W.nr. 1.4571 (AISI 316 Ti)																										
Acid-proof steel, ø8 mm (-50 – 200 °C)	0																		0	None						
Acid-proof steel, ø10 mm (-50 – 200 °C)	1																		G	Standard						
Acid-proof steel, ø11mm (-50 – 400 °C)	2																		L	Standard EEx ia IIC T4/T6						
Other	9																			In heightened lid						
																			A	Standard						
																			J	Standard EEx ia IIC T4/T6						
																			B	Galvanically isolated						
																			9	Other						
																			Connection							
Extension length																										
None	0																		0	2-wire, 3 terminals						
50 mm	1																		1	4-wire, also to be used for 3 wire						
100 mm	2																		2	2 wire, 2 terminals						
Other	9																									
																			Tolerance							
Insertion length																										
50 mm	0050														0				EN 60751 Class B							
100 mm	0100														G				EN 60751 Class A							
150 mm	0150														L				Other							
200 mm	0200																									
250 mm	0250														A											
300 mm	0300														J											
400 mm	0400														B											
500 mm	0500														9											
xx0 mm	xxx0																									
																			Process connection							
Connection head																										
B (IP65)	0														0											
B-mini (IP65) (only up to 4 terminals) (transmitter not possible)	1														1											
Other	9														2											
																			G ¼ A (only ø8 mm protection tube)				0		0	
																			G 3/8 A				1		3	
																			G ½ A				2		9	
																			G ¾ A				3			
																			½ -14 NPT				7			
																			Other				9			

Preferred versions

Certificates, declarations, and approvals

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

Some approvals may change over time. You can check the most current status at danfoss.com or contact your local Danfoss representative if you have any questions.

MBT 5250

Table 18: MBT 5250

File name	Document type	Document topic	Approval authority
DLN 34014-AE002	Marine - Safety Certificate	–	KR
TA18505M	Marine - Safety Certificate	–	NKK
06839-E0 BV	Marine - Safety Certificate	–	BV
17-LD1597279-PDA	Marine - Safety Certificate	–	ABS
TAA000006F Rev. 2	Marine - Safety Certificate	–	DNV GL
ELE-061415XG	Marine - Safety Certificate	–	RINA
GB19PTB00025	Marine - Safety Certificate	–	CCS
14-20066 (E1)	Marine - Safety Certificate	–	LR
DK.C.32.004.A 41461	Measuring - Performance Certificate	–	GOST
097R0004.01	Manufacturers Declaration	RoHS	Danfoss
084R1022.01	Manufacturers Declaration	China RoHS	Danfoss
SMS.W.II-2179-B.0	Marine - Manufacturing Permission	–	BV
12CA69359	Explosive - Safety Certificate	ATEX	DEMKO
087R0017.00	Manufacturers Declaration	Simple apparatus	Danfoss
OC.C.32.004.A 75977	Measuring - Performance Certificate	–	GOST

MBT 5260

Table 19: MBT 5260

File name	Document type	Document topic	Approval authority
DLN 34014-AE002	Marine - Safety Certificate	–	KR
ELE-061415XG	Marine - Safety Certificate	–	RINA
17-LD1597279-PDA	Marine - Safety Certificate	–	ABS
06839-E0 BV	Marine - Safety Certificate	–	BV
TAA000006F Rev. 2	Marine - Safety Certificate	–	DNV GL
TA18505M	Marine - Safety Certificate	–	NKK
14-20066 (E1)	Marine - Safety Certificate	–	LR
DK.C.32.004.A 41461	Measuring - Performance Certificate	–	GOST
097R0004.01	Manufacturers Declaration	RoHS	Danfoss
084R1022.01	Manufacturers Declaration	China RoHS	Danfoss
TAA000012M	Marine - Safety Certificate	–	DNV GL
SMS.W.II-2179-B.0	Marine - Manufacturing Permission	–	BV
12CA69359	Explosive - Safety Certificate	ATEX	DEMKO
087R0017.00	Manufacturers Declaration	Simple apparatus	Danfoss
OC.C.32.004.A 75977	Measuring - Performance Certificate	–	GOST

MBT 5252

Table 20: MBT 5252

File name	Document type	Document topic	Approval authority
GB19PTB00025	Marine - Safety Certificate	–	CCS
DLN 34014-AE002	Marine - Safety Certificate	–	KR
ELE-061415XG	Marine - Safety Certificate	–	RINA
17-LD1597279-PDA	Marine - Safety Certificate	–	ABS
06839-E0 BV	Marine - Safety Certificate	–	BV
TAA000006F Rev. 2	Marine - Safety Certificate	–	DNV GL
TA18505M	Marine - Safety Certificate	–	NKK

Temperature sensor, Types MBT 5250, MBT 5260 and MBT 5252

File name	Document type	Document topic	Approval authority
14-20066 (E1)	Marine - Safety Certificate	–	LR
084R1019.01	EU Declaration	EMCD/ROHS	Danfoss
DK.C.32.004.A 41460	Measuring - Performance Certificate	–	GOST
DK.C.32.004.A 41461	Measuring - Performance Certificate	–	GOST
RU Д-ДК.АЛ87.В.00022_19	EAC Declaration	EMC	EAC
084R1022.01	Manufacturers Declaration	China RoHS	Danfoss
097R0004.01	Manufacturers Declaration	RoHS	Danfoss
SMS.W.II-2179-B.0	Marine - Manufacturing Permission	–	BV
12CA69359	Explosive - Safety Certificate	ATEX	DEMKO
087R0017.00	Manufacturers Declaration	Simple apparatus	Danfoss
OC.C.32.004.A 75977	Measuring - Performance Certificate	–	GOST

Online support

Danfoss offers a wide range of support along with our products, including digital product information, software, mobile apps, and expert guidance. See the possibilities below.

The Danfoss Product Store



The Danfoss Product Store is your one-stop shop for everything product related—no matter where you are in the world or what area of the cooling industry you work in. Get quick access to essential information like product specs, code numbers, technical documentation, certifications, accessories, and more.

Start browsing at store.danfoss.com.

Find technical documentation



Find the technical documentation you need to get your project up and running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more.

Start searching now at www.danfoss.com/en/service-and-support/documentation.

Danfoss Learning



Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications, industry topics, and trends that will help you do your job better.

Create your Danfoss Learning account for free at www.danfoss.com/en/service-and-support/learning.

Get local information and support



Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert—all in your own language.

Find your local Danfoss website here: www.danfoss.com/en/choose-region.