

OpenAir™

## Air damper actuators

GDA..1E, GLA..1E





### Electronic motor driven actuators for open-close, three-position and modulating control

- Nominal torque 5 Nm / 10 Nm
- Operating voltage AC 24 V ~ / DC 24...48 V  $\overline{\text{DC}}$
- Running time for 90° rotary angle 90 s
- Mechanically adjustable span between 0...90°
- Pre-wired with 0.9 m long connection cables
- Position indication: mechanical
- Self-adaption of rotational angle range and adjustable auxiliary switches for supplementary functions

The rotary actuators are used in ventilation and air conditioning plants to regulate and shut off air dampers:

- GDA..1E for damper areas up to 0.8 m<sup>2</sup> , GLA.1E for damper areas up to 1.5 m<sup>2</sup> (guide-line, always observe damper manufacturer's data).
- Suitable for use with modulating controllers (DC 0/2...10 V), open-close or three-position controllers for air dampers or air throttles.
- We recommend a minimum pulse length of 500 ms on rotary actuators operated with 3-point control to ensure continuous and accurate operation.

## Functions

GDA..GLA..	141.1E, 146.1E	161.1E
Power supply	AC 24 V ~ / DC 24...48 V $\overline{\text{---}}$	
Control type	Open-close / three-position	Modulating control (0/2...10 V)
Rotary direction	<p>Clockwise or counter-clockwise direction depends ...</p> <p>... on the type of control</p> <p>... on the setting of the rotary direction switch.</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p><b>CW</b></p>  </div> <div style="text-align: center;"> <p><b>CCW</b></p>  </div> </div> <p>With no power applied, the actuator remains in the respective position.</p>	
Position indication: Mechanical	Rotary angle position indication by using a position indicator.	
Position indication: Electrical	-	<p>Output voltage <math>U = \text{DC } 0/2...10 \text{ V}</math> is generated proportional to the rotary angle. <math>U</math> depends on the rotary direction of the DIL switch.</p>
Auxiliary switch	The switching points for auxiliary switches A and B can be set independent of each other in increments of 5° within 0° to 90°.	
Manual adjustment	The actuator can be manually adjusted by pressing the gear train disengagement button.	
Rotary angle limitation	The rotary angle of the shaft adapter can be limited mechanically with a set screw.	

## Technical design

### Housing

The housing consists essentially of flame retardant, non brominated, non chlorinated glass fiber reinforced plastic.

### Actuator motor / Gears

- Brushless, robust DC motors ensure reliable operation regardless of load. The damper actuators do not require an end position switch, are overload proof, and remain in place upon reaching the end stop.
- The gears are maintenance free and low noise.

## Type summary

Type	Stock no.	Nominal Torque	Control	Operating voltage	Positioning signal Y	Position indicator U = DC 0...10 V	Self-adaption of rotational angle range	Aux. switches	Rotary direction switch
GDA141.1E	S55499-D612	5 Nm	Open-close or three-position	AC 24 V ~ / DC 24...48 V	—	—	—	—	yes
GDA146.1E	S55499-D638							2	
GDA161.1E	S55499-D613		Modulating	AC 24 V ~ / DC 24...48 V	DC 0/2...10 V	yes	yes	—	yes

Type	Stock no.	Nominal Torque	Control	Operating voltage	Positioning signal Y	Position indicator U = DC 0...10 V	Self-adaption of rotational angle range	Aux. switches	Rotary direction switch
GLA141.1E	S55499-D614	10 Nm	Open-close or three-position	AC 24 V ~ / DC 24...48 V	—	—	—	—	yes
GLA146.1E	S55499-D615							2	
GLA161.1E	S55499-D616		Modulating	AC 24 V ~ / DC 24...48 V	DC 0/2...10 V	yes	yes	—	yes

## Accessories

See data sheet N4698

## Product documentation


Topic	Title	Document ID
Mounting instructions	Fast running air damper actuators GDx..1E, GLx..1E	A6V11684392

Related documents such as environmental declarations, CE declarations, etc., can be downloaded at the following Internet address:

<http://siemens.com/bt/download>

## Notes

## Safety

	<b>⚠ Caution</b>
	<b>National safety regulations</b> Failure to comply with national safety regulations may result in personal injury and property damage. <ul style="list-style-type: none"> <li>• Observe national provisions and comply with the appropriate safety regulations.</li> <li>• Use only properly trained technicians for mounting, commissioning, and servicing.</li> </ul>


## Engineering

### Potentiometer and auxiliary switches

Potentiometer and auxiliary switches cannot be added in the field

## Installation

---

	<p><b>⚠ WARNING</b></p> <p><b>No internal line protection for supply lines to external consumers</b></p> <p>Risk of fire and injury due to short-circuits</p> <ul style="list-style-type: none"><li>• Adapt the line diameters as per local regulations to the rated value of the installed fuse.</li></ul>
---	---



## Maintenance

---

The actuators G..D..1E are maintenance-free.

## Disposal

---

 	<p>The device is considered electrical and electronic equipment for disposal in terms of the applicable European Directive and may not be disposed of as domestic garbage.</p> <ul style="list-style-type: none"><li>• Dispose of the device through channels provided for this purpose.</li><li>• Comply with all local and currently applicable laws and regulations.</li></ul>
--	---

Power supply (G..A1...1E)		GDA1..1E	GLA1..1E
Operating voltage (SELV/PELV) / Frequency		AC 24 V ~ $\pm 20\%$ (19.2...28.8 V ~) / 50 / 60 Hz DC 24...48 V $\approx \pm 20\%$ (19.2...57.6 V $\approx$ ) <sup>1)</sup>	
Power consumption running	G..A14..1E, G..A16..1E	1.0 W / 2.0 VA 1.2 W / 2.2 VA	1.4 W / 2.5 VA 1.6 W / 2.7 VA
Power consumption holding	G..A14..1E, G..A16..1E	0.5 W 0.7 W	0.5 W 0.7 W

Function data	GDA..1E	GLA..1E
Nominal torque	5 Nm	10 Nm
Maximum torque (blocked)	10 Nm	16 Nm
Minimum holding torque	5 Nm	10 Nm
Nominal rotary angle (with position indication)	90°	
Maximum rotary angle (mechanic limitation)	95° $\pm 2^\circ$	
Runtime for 90° rotary angle	90 s	
Actuator sound power level	30 dB (A)	

Inputs		
Positioning signal for GDA14..1E		
Operating voltage	(wires 1-6 / G-Y1)	clockwise
AC 24 V ~ / DC 24...48 V $\approx$	(wires 1-7 / G-Y2)	counterclockwise
Positioning signal for GDA16..1E		
Input voltage	(wires 8-2 / Y-G0)	DC 0/2...10 V $\approx$
Current consumption		0.1 mA
Input resistance		> 100 k
Max. Permissible input voltage		DC 35 V $\approx$ limited to DC 10 V $\approx$
Protected against faulty wiring		max. AC 24 V ~ / DC 24...48 V $\approx$
Hysteresis for non-adjustable characteristic function		60 mV

Outputs		
Position indicator		
Output signal (GDA16..1E)	(wires 9-2/U-G0)	
Output voltage U		DC 0...10 V $\approx$
Max. output current		DC $\pm 1$ mA
Protected against faulty wiring		Max. AC 24 V ~ / DC 24...48 V $\approx$

Auxiliary switches (G..A146.1E)		
Switching voltage		AC 24...250 V ~ / DC 12...30 V $\approx$
Contact rating		6 A resistive, 2 A inductive, min. 10 mA @ AC 4 A resistive, 2 A inductive, min. 10 mA @ DC 30 V $\approx$ 0.8 A res., 0.5 A inductive, min. 10 mA @ DC 60 V $\approx$
Electric strength auxiliary switch against housing		AC 4 kV
Switching range for auxiliary switches / setting increments		5...90° / 5°
Factory switch setting:	Switch A	5°
	Switch B	85°

Connection cables	
Cable length	0.9 m
Cross section of prewired connection cables	0.75 mm <sup>2</sup>
Permissible length for signal lines	300 m


Degree of protection	
Insulation class	As per EN 60730
AC 24 V ~ / DC 24...48 V $\approx$	III
auxiliary switches	II
Housing protection	IP 54 as per EN 60529

Environmental conditions	
Operation	IEC 60721-3-3
Climatic conditions	Class 3K5
Mounting location	interior, weather-protected
Temperature extended	- 32...+ 55°C
Humidity (non-condensing)	< 95 % r.h.
Transport	IEC 60721-3-2
Climatic conditions	Class 2K3
Temperature extended	- 32...+ 70°C
Humidity (non-condensing)	< 95 % r.h.
Storage	IEC 60721-3-1
Climatic conditions	Class 1K3
Temperature extended	- 32...+ 50°C
Humidity (non-condensing)	< 95 % r.h.
Mechanical conditions	Class 2M2
Standards, directives and approvals	
Product standard	EN 60730 Part 2-14 / Particular requirements for electric actuators
Electromagnetic compatibility (Applications)	For use in residential, commercial, light-industrial and industrial environments
EU Conformity (CE)	
GDA141.1E, GDA146.1E, GDA161.1E	A5W00026943
GLA141.1E, GLA146.1E, GLA161.1E	A5W00026945
RCM	
GDA141.1E, GDA146.1E, GDA161.1E	A5W00026947
GLA141.1E, GLA146.1E, GLA161.1E	A5W00026949
EAC	Eurasian conformity
Environmental compatibility	
The product environmental declaration (A5W00026066) contains data on environmentally compatible product design and assessments (RoHS compliance, materials composition, packaging, environmental benefit, disposal).	
Dimensions	
Actuator W x H x D	See "Dimensions" P8
Damper shaft	
round	8... 16 mm
round	8... 10 mm (with centering element)
Square	6... 12.8 mm
Min. shaft length	20 mm
Shaft hardness	< 300 HV
Weight	
Without packaging	Max. 0.49 kg, without switches Max. 0.63 kg, with switches


\* The documents can be downloaded from <http://siemens.com/bt/download>.

# Internal Diagrams

G..A14..1E (open-close, three-p.)

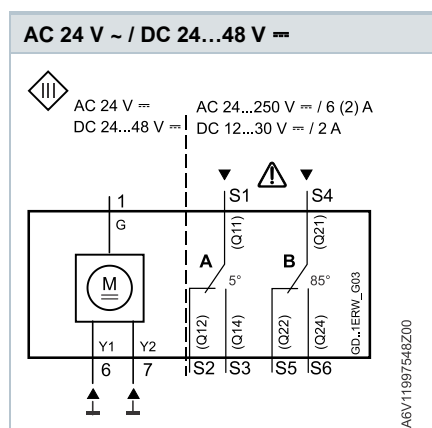

G..A16..1E (modulating, Y= DC 0/2...10 V =)

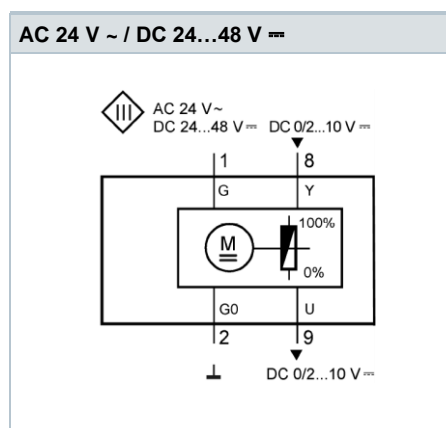

## Connection diagrams


G..A1..1E (AC 24 V ~ / DC 24...48 V =)

Open-close, single wire control Single Pole Single Throw (SPST)	Open-close, two wire control Single Pole Double Throw (SPDT)	Three-position control	Modulating control
<p>AC 24 V ~ DC 24...48 V =</p> <p>GD..1E_A05</p>	<p>AC 24 V ~ DC 24...48 V =</p> <p>GD..1E_A06</p>	<p>AC 24 V ~ DC 24...48 V =</p> <p>GD..1E_A07</p>	<p>AC 24 V ~ DC 24...48 V =</p> <p>GD..1E_A08</p>
<p>AC 24 V ~ DC 24...48 V =</p> <p>GD..1E_A09</p>	<p>AC 24 V ~ DC 24...48 V =</p> <p>GD..1E_A10</p>	<p>AC 24 V ~ DC 24...48 V =</p> <p>GD..1E_A11</p>	

## Cable labeling

Connection	Code	No	Color	Abbreviation	Meaning
Actuators	G	1	red	RD	System potential AC 24 V ~ / DC 24...48 V =
AC 24 V ~	G0	2	black	BK	System neutral
DC 24...48 V =	Y1	6	purple	VT	Positioning signal AC/DC 0 V, "clockwise" (G..A14..1E)
	Y2	7	orange	OG	Positioning signal AC/DC 0 V, "counter-clockwise" (G..A14..1E)
	Y	8	grey	GY	Signal in (G..A16..1E)
	U	9	pink	PK	Signal out (G..A16..1E)
Auxiliary switch	Q11	S1	grey/red	GY RD	Switch A input
	Q12	S2	grey/blue	GY BU	Switch A normally closed contact
	Q14	S3	grey/pink	GY PK	Switch A normally open contact
	Q21	S4	black/red	BK RD	Switch B input
	Q22	S5	black/blue	BK BU	Switch B normally closed contact
	Q24	S6	black/pink	BK PK	Switch B normally open contact

## Dimensions

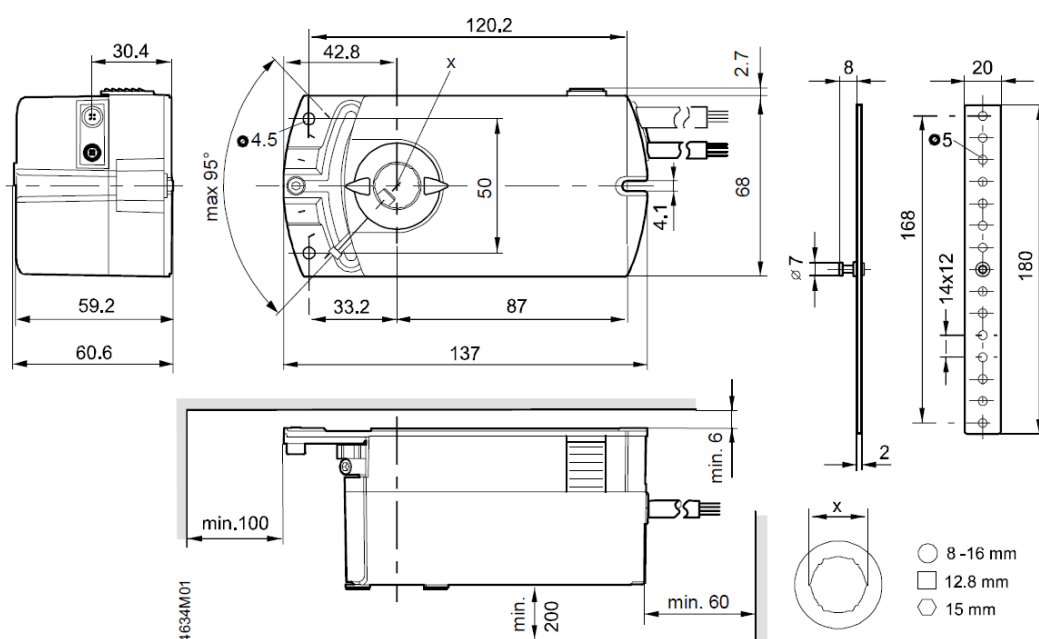

Dimensions in mm

## Revision numbers

Type	Valid from rev. no.	Type	Valid from rev. no.
GDA141.1E	. .E	GLA141.1E	. .E
GDA146.1E	. .E	GLA146.1E	. .E
GDA161.1E	. .E	GLA161.1E	. .E

Issued by  
Siemens Switzerland Ltd  
Smart Infrastructure  
Global Headquarters  
Theilerstrasse 1a  
CH-6300 Zug  
Tel. +41 58 724 2424  
[www.siemens.com/buildingtechnologies](http://www.siemens.com/buildingtechnologies)

© Siemens Switzerland Ltd, 2020  
Technical specifications and availability subject to change without notice.