

OpenAir™

## Air damper actuators, running time 30 s

GDD..1E, GLD..1E



### Electronic motor driven actuators for open-close, 3-position and modulating control





- Nominal torque: 5 Nm / 8 Nm
- Operating voltage: AC 24 V ~ / DC 24...48 V =
- Running time for 90° rotary angle: 30 s
- Mechanically adjustable span: 0...90°
- Position indication: mechanical and electrical
- Pre-wired with 0.9 m long connection cables
- Self-adaptation of rotational angle range and adjustable auxiliary switches for supplementary functions

## Use

The rotary actuators are used in ventilation and air conditioning plants to regulate and shut off air dampers:

- GDD..1E for damper areas up to 0.8 m<sup>2</sup>  
GLD..1E for damper areas up to 1.2 m<sup>2</sup>  
(These are guidelines; always observe damper manufacturer's data.)
- Suitable for use with modulating controllers (DC 0/2...10 V), open-close or 3-position controllers for air dampers or air throttles.
- We recommend a minimum pulse length of 500 ms on rotary actuators operated with 3-position control to ensure continuous and accurate operation.

## Functions

GDD.., GLD..		141.1E 146.1E	161.1E
Power supply		AC 24 V ~ / DC 24...48 —	
Control type		Open-close 3-position	Modulating control (0/2...10 V)
Rotary direction		Clockwise or counter-clockwise direction depending...	
		<ul style="list-style-type: none"> <li>• ...on the type of control;</li> <li>• ...on the setting of the rotary direction switch.</li> </ul> <div> <div><b>CW</b></div>  <div><b>CCW</b></div>  </div>	<ul style="list-style-type: none"> <li>• ...on the position signal;</li> <li>• ...on the setting of the rotary direction DIL switch.</li> </ul> <div> <div><b>CW</b></div>  <div><b>CCW</b></div>  </div>
		With no power applied, the actuator remains in the respective position.	The actuator remains in the achieved position... <ul style="list-style-type: none"> <li>• ...if the control signal is maintained at a constant value;</li> <li>• ...in the event of a loss of operating voltage.</li> </ul>
Position indication:	Mechanical	Rotary angle position indication by using a position indicator.	
	Electrical	-	Output voltage U = DC 0/2...10 V is generated proportionally to the rotary angle. U depends on the rotary direction of the DIL switch setting.

GDD., GLD..	141.1E 146.1E	161.1E
Auxiliary switch	The switching points for auxiliary switches A and B can be set independently of each other in increments of 5° within 0...90°.	
Manual adjustment	The actuator can be manually adjusted by pressing the gear train disengagement button.	
Rotary angle limitation	The rotary angle of the shaft adapter can be limited mechanically with a set screw.	

## Technical design

### Housing

The housing consists essentially of flame retardant, non-brominated, non-chlorinated glass fiber reinforced plastic.

### Actuator motor / Gears

- Brushless, robust DC motors ensure reliable operation regardless of load. The damper actuators do not require an end position switch, are overload proof, and remain in place upon reaching the end stop.
- The gears are maintenance-free and low noise.

## Type summary

Type	Stock no.	Nom. torque	Control	Operating voltage	Positioning signal Y	Position indicator U = DC 0...10 V	Self-adapt. of rot. angle range	Aux. switch	Rotary direct. switch
GDD141.1E	S55499-D592	5 Nm	Open-close or 3-position	AC 24 V ~ / DC 24...48 V <sup>***</sup>	-	-	-	-	yes
GDD146.1E	S55499-D593				-	-	-	2	
GDD161.1E	S55499-D594		Modulating		DC 0/2...10 V <sup>***</sup>	yes	yes	-	yes
GLD141.1E	S55499-D595	8 Nm	Open-close or 3-position	AC 24 V ~ / DC 24...48 V <sup>***</sup>	-	-	-	-	yes
GLD146.1E	S55499-D596				-	-	-	2	
GLD161.1E	S55499-D597		Modulating		DC 0/2...10 V <sup>***</sup>	yes	yes	-	yes

## Accessories

See data sheet N4698.



Topic	Title	Document ID:
Mounting instructions	Fast running air damper actuators GDx..1E, GLx..1E	A6V11684392
Data sheet	Accessories and spare parts for air damper actuators ASK..	CM2N4698

Related documents such as the environmental declarations, declarations of conformity, etc., can be downloaded from the following Internet address:

[www.siemens.com/bt/download](http://www.siemens.com/bt/download)

## Notes

### Security



 <b>CAUTION</b>	
	<p><b>National safety regulations</b></p> <p>Failure to comply with national safety regulations may result in personal injury and property damage.</p> <ul style="list-style-type: none"><li>• Observe national provisions and comply with the appropriate safety regulations.</li><li>• Only qualified personnel may mount, commission, and service the device.</li></ul>

### Engineering

#### Potentiometer and auxiliary switches

Potentiometer and auxiliary switches cannot be added in the field.

### Installation

 <b>WARNING</b>	
	<p><b>No internal line protection for supply lines to external consumers</b></p> <p>Risk of fire and injury due to short-circuits</p> <ul style="list-style-type: none"><li>• Adapt the line diameters as per local regulations to the rated value of the installed fuse.</li></ul>

### Maintenance

The actuators G..D..1E are maintenance-free.

Disposal



The device is considered an electronic device for disposal in accordance with European Directive and may not be disposed of as domestic waste.

- Use only designated channels for disposing the devices.
- Comply with all local and currently applicable laws and regulations.

## Technical data

Power supply			GDD..1E	GLD..1E
Operating voltage			AC 24 V ~ ± 20 % (19.2...28.2 V ~) DC 24...48 V = ± 20 % (19.2...57.6 V =) (SELV / PELV)	
Frequency			50/60 Hz	
Power consumption	Running	G..D14..1E	1.2 W / 1.9 VA	1.6 W / 2.3 VA
		G..D16..1E	1.5 W / 2.1 VA	1.8 W / 2.5 VA
	Holding	G..D14..1E	0.4 W / 0.7 VA	0.4 W / 0.7 VA
		G..D16..1E	0.6 W / 0.9 VA	0.6 W / 0.9 VA

Function data		GDD..1E	GLD..1E
Nominal torque		5 Nm	8 Nm
	Maximum torque (blocked)	10 Nm	16 Nm
	Minimum holding torque	5 Nm	8 Nm
Nominal rotary angle (with position indication)		90°	
	Maximum rotary angle (mechanic limitation)	95° ± 2°	
Runtime for 90° rotary angle		30 s	
Actuator sound power level		32 dB (A)	

Inputs			
Positioning signal for G..D14..1E			
	Operating voltage	(wires 1-6 / G-Y1)	Clockwise
	AC 24 V ~ / DC 24...48 V <sup>***</sup>	(wires 1-7 / G-Y2)	Counter-clockwise
Positioning signal for G..D16..1E			
	Input voltage	(wires 8-2 / Y-G0)	DC 0/2...10 V <sup>***</sup>
	Current consumption		0.1 mA
	Input resistance		>100 kΩ
Max. permissible input voltage			DC 35 V <sup>***</sup> limited to DC 10 V <sup>***</sup>
	Protected against faulty wiring		Max. AC 24 V ~ / DC 24...48 V <sup>***</sup>
Hysteresis for non-adjustable characteristic function			60 mV

Outputs		
Position indicator		
Output signal (G..D16..1E)	(wires 9-2 / U-G0)	
	Output voltage U	DC 0...10 V $\approx$
	Max. output current	DC $\pm$ 1 mA
	Protected against faulty wiring	Max. AC 24 V $\sim$ / DC 24...48 $\approx$

Auxiliary switches (G..D146.1E)		
Switching voltage		AC 24...250 V $\sim$ / DC 12...30 $\approx$
Contact rating		6 A resistive, 2 A inductive, min. 10 mA at AC 4 A resistive, 2 A inductive, min. 10 mA at DC 30 V $\approx$ 0.8 A resistive, 0.5 A inductive, min. 10 mA at DC 60 V $\approx$
Electric strength auxiliary switch against housing		AC 4 kV
Switching range for auxiliary switches / setting increments		5...90° / 5°
Factory setting	Switch A	5°
	Switch B	85°

Connection cables	
Cable length	0.9 m
Cross-section	0.75 mm <sup>2</sup>
Permissible length for signal lines	300 m

Degree of protection		
Insulation class		As per EN 60730
	AC 24 V $\sim$ / DC 24...48 $\approx$	III
	Auxiliary switches	II
Housing protection		IP54 as per EN 60529

Environmental conditions		
Operation		IEC 60721-3-3
	Climatic conditions	Class 3K5
	Mounting location	Interior, weather-protected
	Temperature extended	-32...55 °C

Environmental conditions			
		Humidity (non-condensing)	<95 % r.h.
Transport			IEC 60721-3-2
	Climatic conditions		Class 2K3
		Temperature extended	-32...70 °C
		Humidity (non-condensing)	<95 % r.h.
Storage			IEC 60721-3-1
	Climatic conditions		Class 1K3
		Temperature extended	-32...50 °C
		Humidity (non-condensing)	<95 % r.h.
Mechanical conditions			Class 2M2

Standards, directives and approvals		
Product standard		EN 60730 / Part 2-14 Particular requirements for electric actuators
Electromagnetic compatibility (Applications)		For use in residential, commercial, light-industrial and industrial environments
EU Conformity (CE)		
	GDD..1E	A5W00026942 <sup>1)</sup>
	GLD..1E	A5W00026944 <sup>1)</sup>
UK Conformity (UKCA)		
	GDD..1E	A5W00219359A <sup>1)</sup>
	GLD..1E	A5W00219360A <sup>1)</sup>
RCM		
	GDD..1E	A5W00026946 <sup>1)</sup>
	GLD..1E	A5W00026948 <sup>1)</sup>
EAC		Eurasian conformity

Environmental compatibility
The product environmental declaration A5W00026066 <sup>1)</sup> contains data on environmentally compatible product design and assessments (RoHS compliance, materials composition, packaging, environmental benefit, disposal).

Dimensions		
Actuator W x H x D		See Dimensions [► 11]
Damper shaft		
	Round	8...16 mm




Dimensions		
		8...10 mm (with centering element)
	Square	6...12.8 mm
	Min. shaft length	20 mm
	Max. shaft hardness	300 HV

Weight		
Without packaging	Without switches	Max. 0.49 kg
	With switches	Max. 0.63 kg


1) The documents can be downloaded from <http://siemens.com/bt/download>.

Diagrams

Internal Diagrams

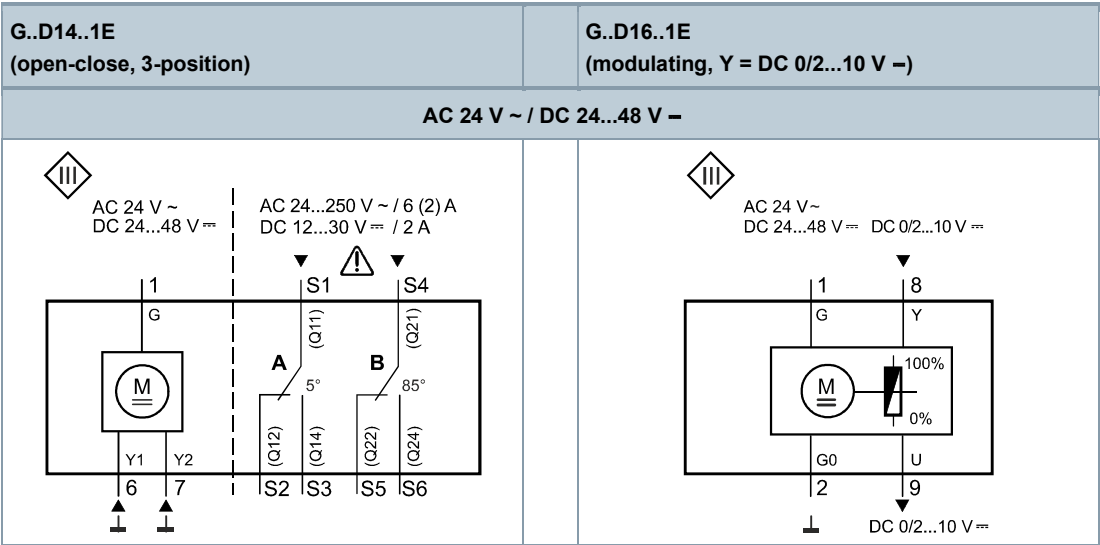


## Connection diagrams

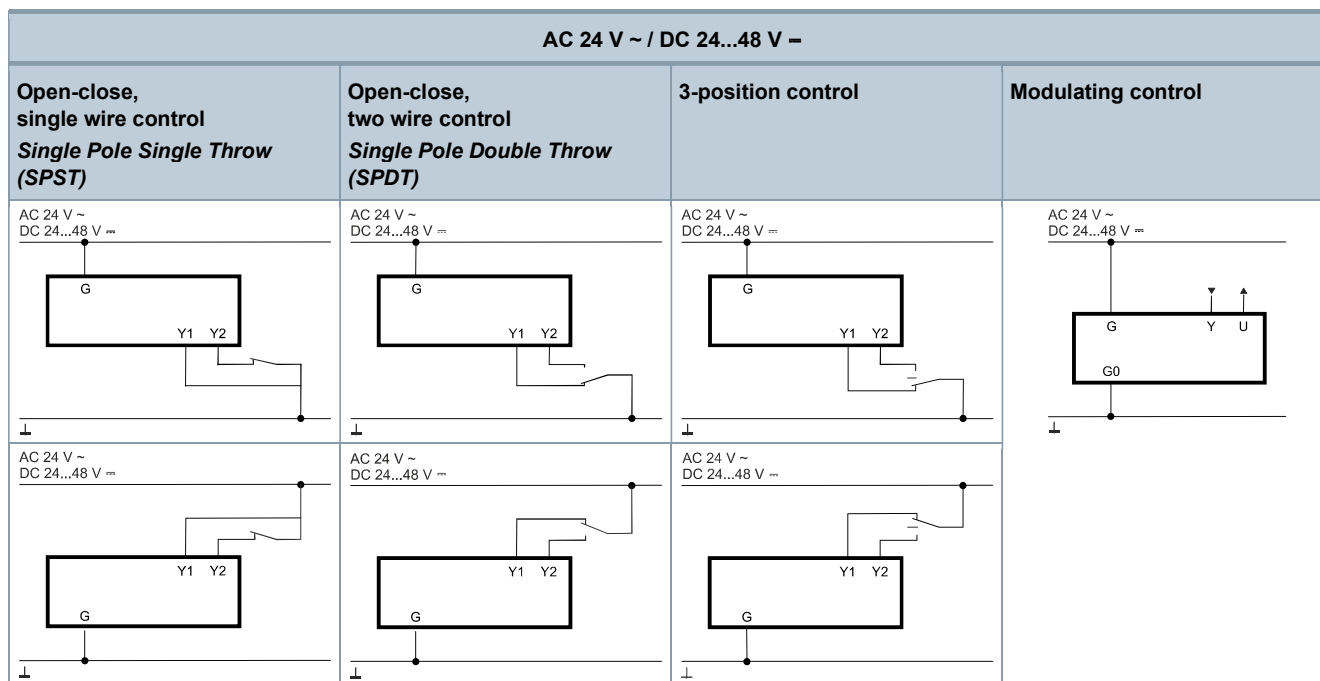

## Cable labeling

Connection	Code	No.	Color	Abbreviation	Meaning
Actuators AC 24 V ~ DC 24...48 V –	G	1	red	RD	System potential AC 24 V ~ / DC 24...48 V –
	G0	2	black	BK	System neutral
	Y1	6	purple	VT	Positioning signal AC/DC 0 V, “clockwise” (G..D14..1E)
	Y2	7	orange	OG	Positioning signal AC/DC 0 V, “counter-clockwise” (G..D14..1E)
	Y	8	grey	GY	Signal in (G..D16..1E)
	U	9	pink	PK	Signal out (G..D16..1E)
Auxiliary switch	Q11	S1	grey/red	GY RD	Switch A input
	Q12	S2	grey/blue	GY BU	Switch A normally closed contact
	Q14	S3	grey/pink	GY PK	Switch A normally open contact
	Q21	S4	black/red	BK RD	Switch B input
	Q22	S5	black/blue	BK RD	Switch B normally closed contact
	Q24	S6	black/pink	BK PK	Switch B normally open contact

## Dimensions

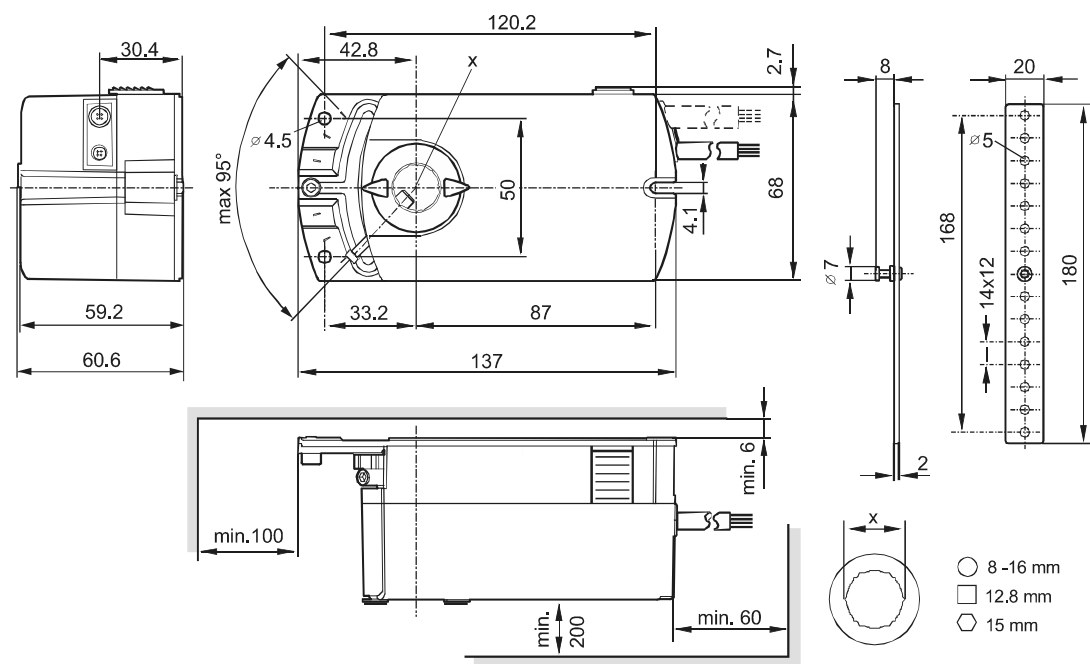

Dimensions in mm

Issued by  
Siemens Switzerland Ltd  
Smart Infrastructure  
Global Headquarters  
Theilerstrasse 1a  
CH-6300 Zug  
+41 58 724 2424  
[www.siemens.com/buildingtechnologies](http://www.siemens.com/buildingtechnologies)

© Siemens 2022  
Technical specifications and availability subject to change without notice.